




Manufacturers of Agricultural Equipment



LOADMASTER FARM TRAILER 1.12T Specifications

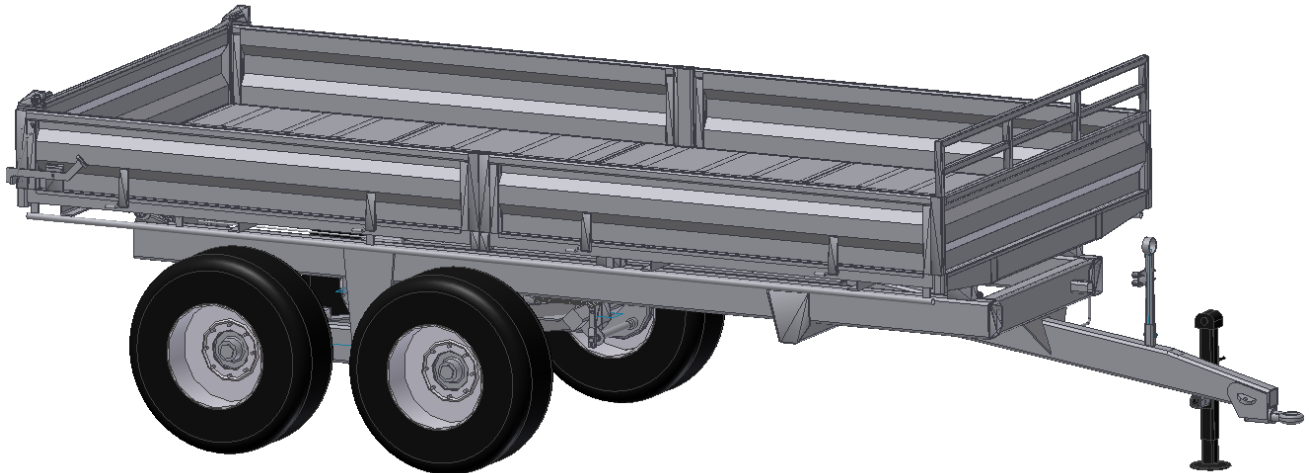

BODY TYPE:	Steel Flat Floor Hinged removable Sides and Headboard
CAPACITY:	12 Tonnes by design
CAPACITIES: (Level Load)	5.6m ³ level loaded @ 2,000 kgs/m ³
BODY LENGTH:	5,450mm
BODY WIDTH:	2,440mm
BODY DEPTH:	425mm
LOADING HEIGHT:	1,190mm (Ground to Floor on Standard Wheels)
OIL REQUIREMENT:	20 litres of oil to lift to 60° and terminating at ½" QRC
RAM TYPE:	1st stage 29.7 tonnes 2nd stage 22.4 tonnes 3rd stage 116.1tonnes 4th stage 10.9tonnes 5th stage 6.5tonnes
TANDEM AXLE:	90mm/8 stud brakeless 17,000kgs@40km/hr

WHEELS ON TANDEM:	385 / 65 x 22.5 - 28ply 19,200KGS@40km/hr
BRAKES:	Optional
CHASSIS:	200 x 100 x 9mm fully welded
TOP CHASIS:	152 x 76 RHS
SIDES:	Detachable hinging sides that bolt in rigid, allowing easy access to side loading, RHS top shock rail to prevent damage. There are 2 removable panels with a centre deck Staunchen each side.
HEADBOARD:	Detachable with RHS top shock rail and extension rails with corner sockets in deck
TAILGATE:	Detachable tailgate with RHS top shock rail includes independent corner posts that allow rear door to be removed yet sides fixed. Door hinge is 100mm higher and 100mm forward of central balance point
TAILGATE LOCKING:	Auto Open Door opening at 15° and fitted with spreading chains or bottom hinged, top locking via anti-loose latches as standard
ROPE RAILS:	Fitted with 1" bore pipe attached every third floor member (recommended)
FLOOR THICKNESS:	3mm Corten non rust braced every 350mm (see options)
SIDE THICKNESS:	Pressed 3mm Corten non rust with upright bracing
ROAD LIGHTS:	Optional
DRAW BAR:	200 x 100 x 9mm single beam drawbar
DRAW BAR SUPPORT:	Fitted with 80mm jack support
TOWING EYE:	Fixed 50mm eye
FINISH:	Blasted, zinc base primer, 2 x gloss coats
COLOUR:	Standard Yellow

NOTES: