




Manufacturers of Agricultural Equipment



Specifications - 2.25T or 3.25T

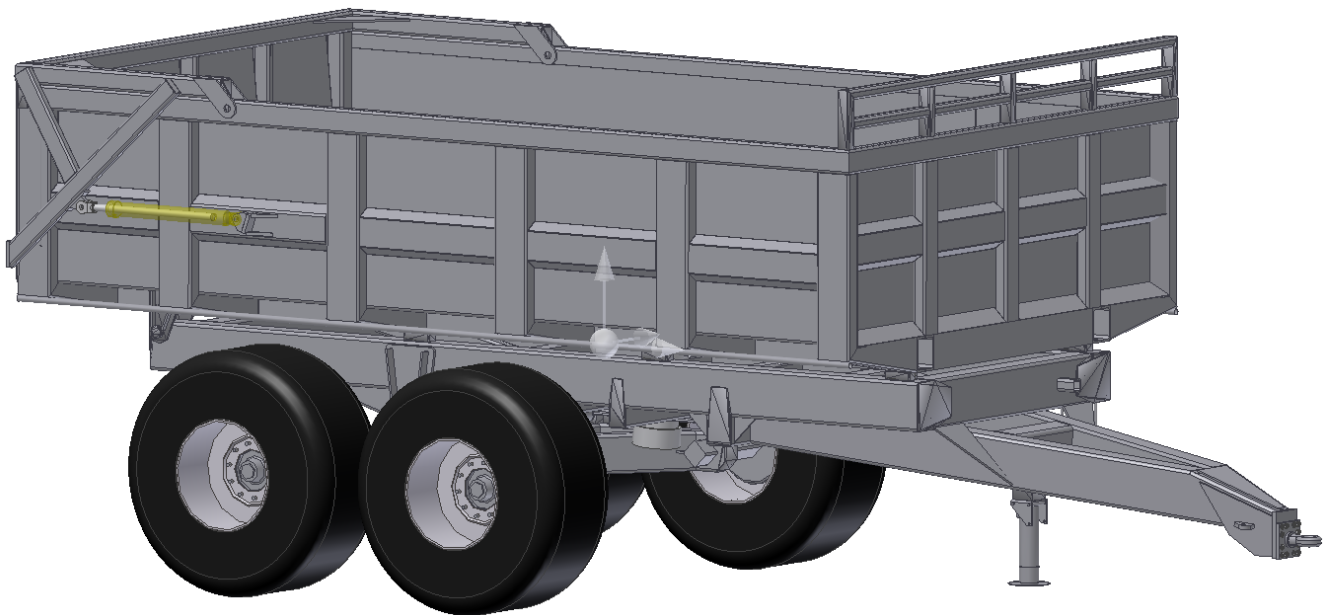

BODY TYPE:	4mm Corten non rust steel deck (up to 12mm) sitting flat on top chassis with heavy floor bars and commercial side raves with fixed headboard - lift off sides are standard with optional bath tub body
CAPACITY:	25 Tonnes Level Loaded
CAPACITIES: (Level Load)	9m <sup>3</sup> level loaded on 700mm side
BODY LENGTH:	5,450mm
BODY WIDTH:	2,900mm
BODY DEPTH:	Lift off side 600mm Monocoque body 900mm
LOADING HEIGHT:	1,450mm Tandem Axle Ground to floor on standard wheels

OIL REQUIREMENT:	50 litres of oil to lift to 60° and terminating at ½” QRC
RAM TYPE:	1st stage 56.2 tonnes 2nd stage 42.6 tonnes 3rd stage 34.5 tonnes 4th stage 26.8 tonnes 5th stage 20.3 tonnes 6th stage 14.4 tonnes calculated at 180 bar
TANDEM AXLE:	130mm / 10 stud braked at 32,000kgs@ 40km/
WHEELS ON TANDEM:	560 / 60R x 22.5 capacity of 30 tonnes
BRAKES:	Standard
CHASSIS:	250 x 150 x 9mm fully welded chassis
TOP CHASIS:	200 x 100 x 6mm
FLOOR THICKNESS:	4mm corten braced every 450mm nominal - options up to 12mm floor
SIDE THICKNESS:	4mm with upright bracing
DRAW BAR:	250 x 150 x 9mm on single beam
DRAW BAR SUPPORT:	100mm hydraulic support leg
TOW EYE:	Swivel 50mm eye
SIDES:	Standard with one piece lift off side for maximum strength, RHS top & bottom rails with upright bracing to welded sheet fitted with centre support extrusion - monocoque optional
HEADBOARD:	Fixed headboard with 4 x upright RHS members locking in to the deck with 4mm steel welded with centre external extrusion, RHS double railed goal posts extension with entry steps fitted for access
TAILGATE:	Standard with top hinged bottom locking tailgate with hinge point 200mm higher than side in forward position ensuring closing, made of RHS heavy duty frame and double skinned 3mm outer sheet and 3mm inner sheet set on angle
TAILGATE LOCKING:	Fitted with hydraulic locking tailgate operated from the tractor cab, ensuring both emptying and locking is done quickly by the operator, fitted with spreading chains as standard - optional hydraulic up and over door
ROPE RAILS:	Standard fitting with 1” bore pipe attached every



*Manufacturers of Agricultural Equipment*



	third floor member to NZ standard 5444
ROAD LIGHTS:	Optional LED lights fitted to rear or front and rear
FINISH:	Blasted, zinc base primer, 2 x gloss coats
COLOUR:	Standard Yellow, Wheels White and Doors Charcoal
OPTIONS:	Discuss your individual requirements with your dealer as a range of options are available.

**NOTES:**